


Inch Tapered Roller Bearing

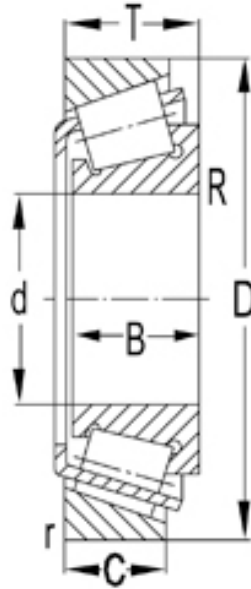

Bearing Designation		Dimension [mm]							Basic load ratings (kN)		Speed ratings (rpm)		Weight (Kg)
Cone	Cup	d	D	T	B	C	R	r	Cr	Cor	Grease	Oil	
11590	11520	15.875	42.862	14.288	14.288	9.525	1.5	1.5	17.6	17.6	8500	12000	0.1
LM11749	LM11710	17.462	39.878	13.843	14.605	10.668	1.3	1.3	21.2	20.8	9000	13000	0.081
LM11949	LM11910	19.050	45.237	15.494	16.637	12.065	1.3	1.3	27.5	27.5	8500	12000	0.12
09067	09195	19.050	49.225	18.034	19.05	14.288	1.3	1.3	39.1	40	8000	11000	0.18
09074	09196	19.050	49.225	23.02	21.539	17.462	1.5	1.5	39.1	40	8000	11000	0.21
A6075	A6157	19.050	39.992	12.014	11.153	9.525	1.0	1.3	14.9	15.7	9500	13000	0.066
09067	09196	19.050	49.225	21.209	19.050	17.462	1.3	1.5	39.1	40	8000	11000	0.2
09074	09195	19.050	49.225	19.845	21.539	14.288	1.5	1.3	39.1	40	4300	8000	0.19
09074	09194	19.050	49.225	23.020	21.539	17.462	1.5	3.5	37.5	37.0	8500	11000	0.21
12580	12520	20.638	49.225	19.845	19.845	15.875	1.5	1.5	37.5	39.0	8200	11000	
M12649	M12610	21.430	50.005	17.526	18.288	13.970	1.3	1.3	36.9	38	8000	11000	0.17
LM12749	LM12710	21.986	45.237	15.494	16.637	12.065	1.3	1.3	27.5	31	8000	11000	0.12
LM12749	LM12711	21.986	45.974	15.494	16.637	12.065	1.3	1.3	27.5	31	8000	11000	0.12
M12648	M12610	22.225	50.005	17.526	18.288	13.970	1.3	1.3	39.1	40.7	8500	11000	0.17
1280	1220	22.225	57.150	22.225	22.225	17.462	0.8	1.6	52.6	55.7	7600	10000	
1755	1729	22.225	56.896	19.368	19.837	15.875	1.3	0.8	46	43.1	7600	10000	
07093	07196	23.812	50.005	13.495	14.260	9.525	1.5	1.0	26.0	27.9	7600	10000	
07097	07196	25.000	50.005	13.495	14.260	9.525	1.5	1.0	26.7	28.8	7900	11000	0.146
07100	07204	25.400	51.994	15.011	14.260	12.700	1.5	1.3	26.7	28.8	7900	11000	0.145
1780	1729	25.400	56.896	19.368	19.837	15.875	0.8	1.3	42.5	46.5	7200	9600	
L44643	L44610	25.400	50.292	14.224	14.732	10.668	1.3	1.3	26	30	7500	10000	0.13
M84548	M84510	25.400	57.150	19.431	19.431	14.732	1.5	1.5	39.6	45	6700	9000	0.24
15101	15243	25.400	61.912	19.050	20.638	14.288	0.8	2.0	44.6	50.7	6400	8600	0.28

Inch Tapered Roller Bearing

07100	07196	25.400	50.005	13.495	14.260	9.525	1.5	1.0	26.7	28.8	7900	11000	0.12
15101	15245	25.400	62.000	19.050	20.638	14.288	0.8	1.3	48.4	57	6000	8000	0.31
15101	15250X	25.400	63.500	20.638	20.638	15.875	0.8	1.5	48.4	57	6000	8000	0.34
L44649	L44610	26.988	50.292	14.224	14.732	10.668	3.5	1.3	26	30	7500	10000	0.11
1988	1922	28.575	57.150	19.845	19.355	15.875	3.5	1.5	47.3	55	6700	9000	0.22
02474	02420	28.575	68.262	22.225	22.225	17.462	0.8	1.5	58.3	69.5	5600	7500	0.42
02872	02820	28.575	73.025	22.225	22.225	17.462	0.8	3.2	55.0	65.7	5500	7400	